

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as First Class Mail in an envelope addressed to:

"Assistant Commissioner for Patents
Washington, D.C. 20231"

on April 6, 2004


RIMMA MITELMAN
Reg. No. 34,396
Attorney for Applicant(s)

04/06/04
Date of Signature

PATENT
#02-0531-UNI
Case #C4276(C)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Claesson et al.
Serial No.: 10/735,376
Filed: December 12, 2003
For: POLYMERS AND LAUNDRY DETERGENT COMPOSITIONS CONTAINING THEM

Edgewater, New Jersey 07020
April 6, 2004

SUBMISSION OF PRIORITY DOCUMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Pursuant to rule 55(b) of the Rules of Practice in Patent Cases, Applicant(s) is/are submitting herewith a certified copy of the United Kingdom Application No. 0229147.4 filed December 13, 2002, upon which the claim for priority under 35 U.S.C. § 119 was made in the United States.

It is respectfully requested that the priority document be made part of the file history.

Respectfully submitted,


Rimma Mitelman
Registration No. 34,396
Attorney for Applicant(s)

RM/mt
(201) 840-2671





INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

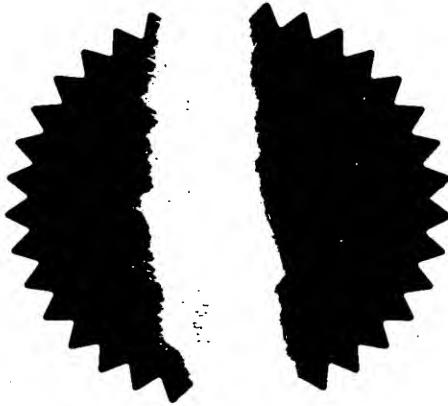

Signed *Stephen Ward*

Dated 3 November 2003

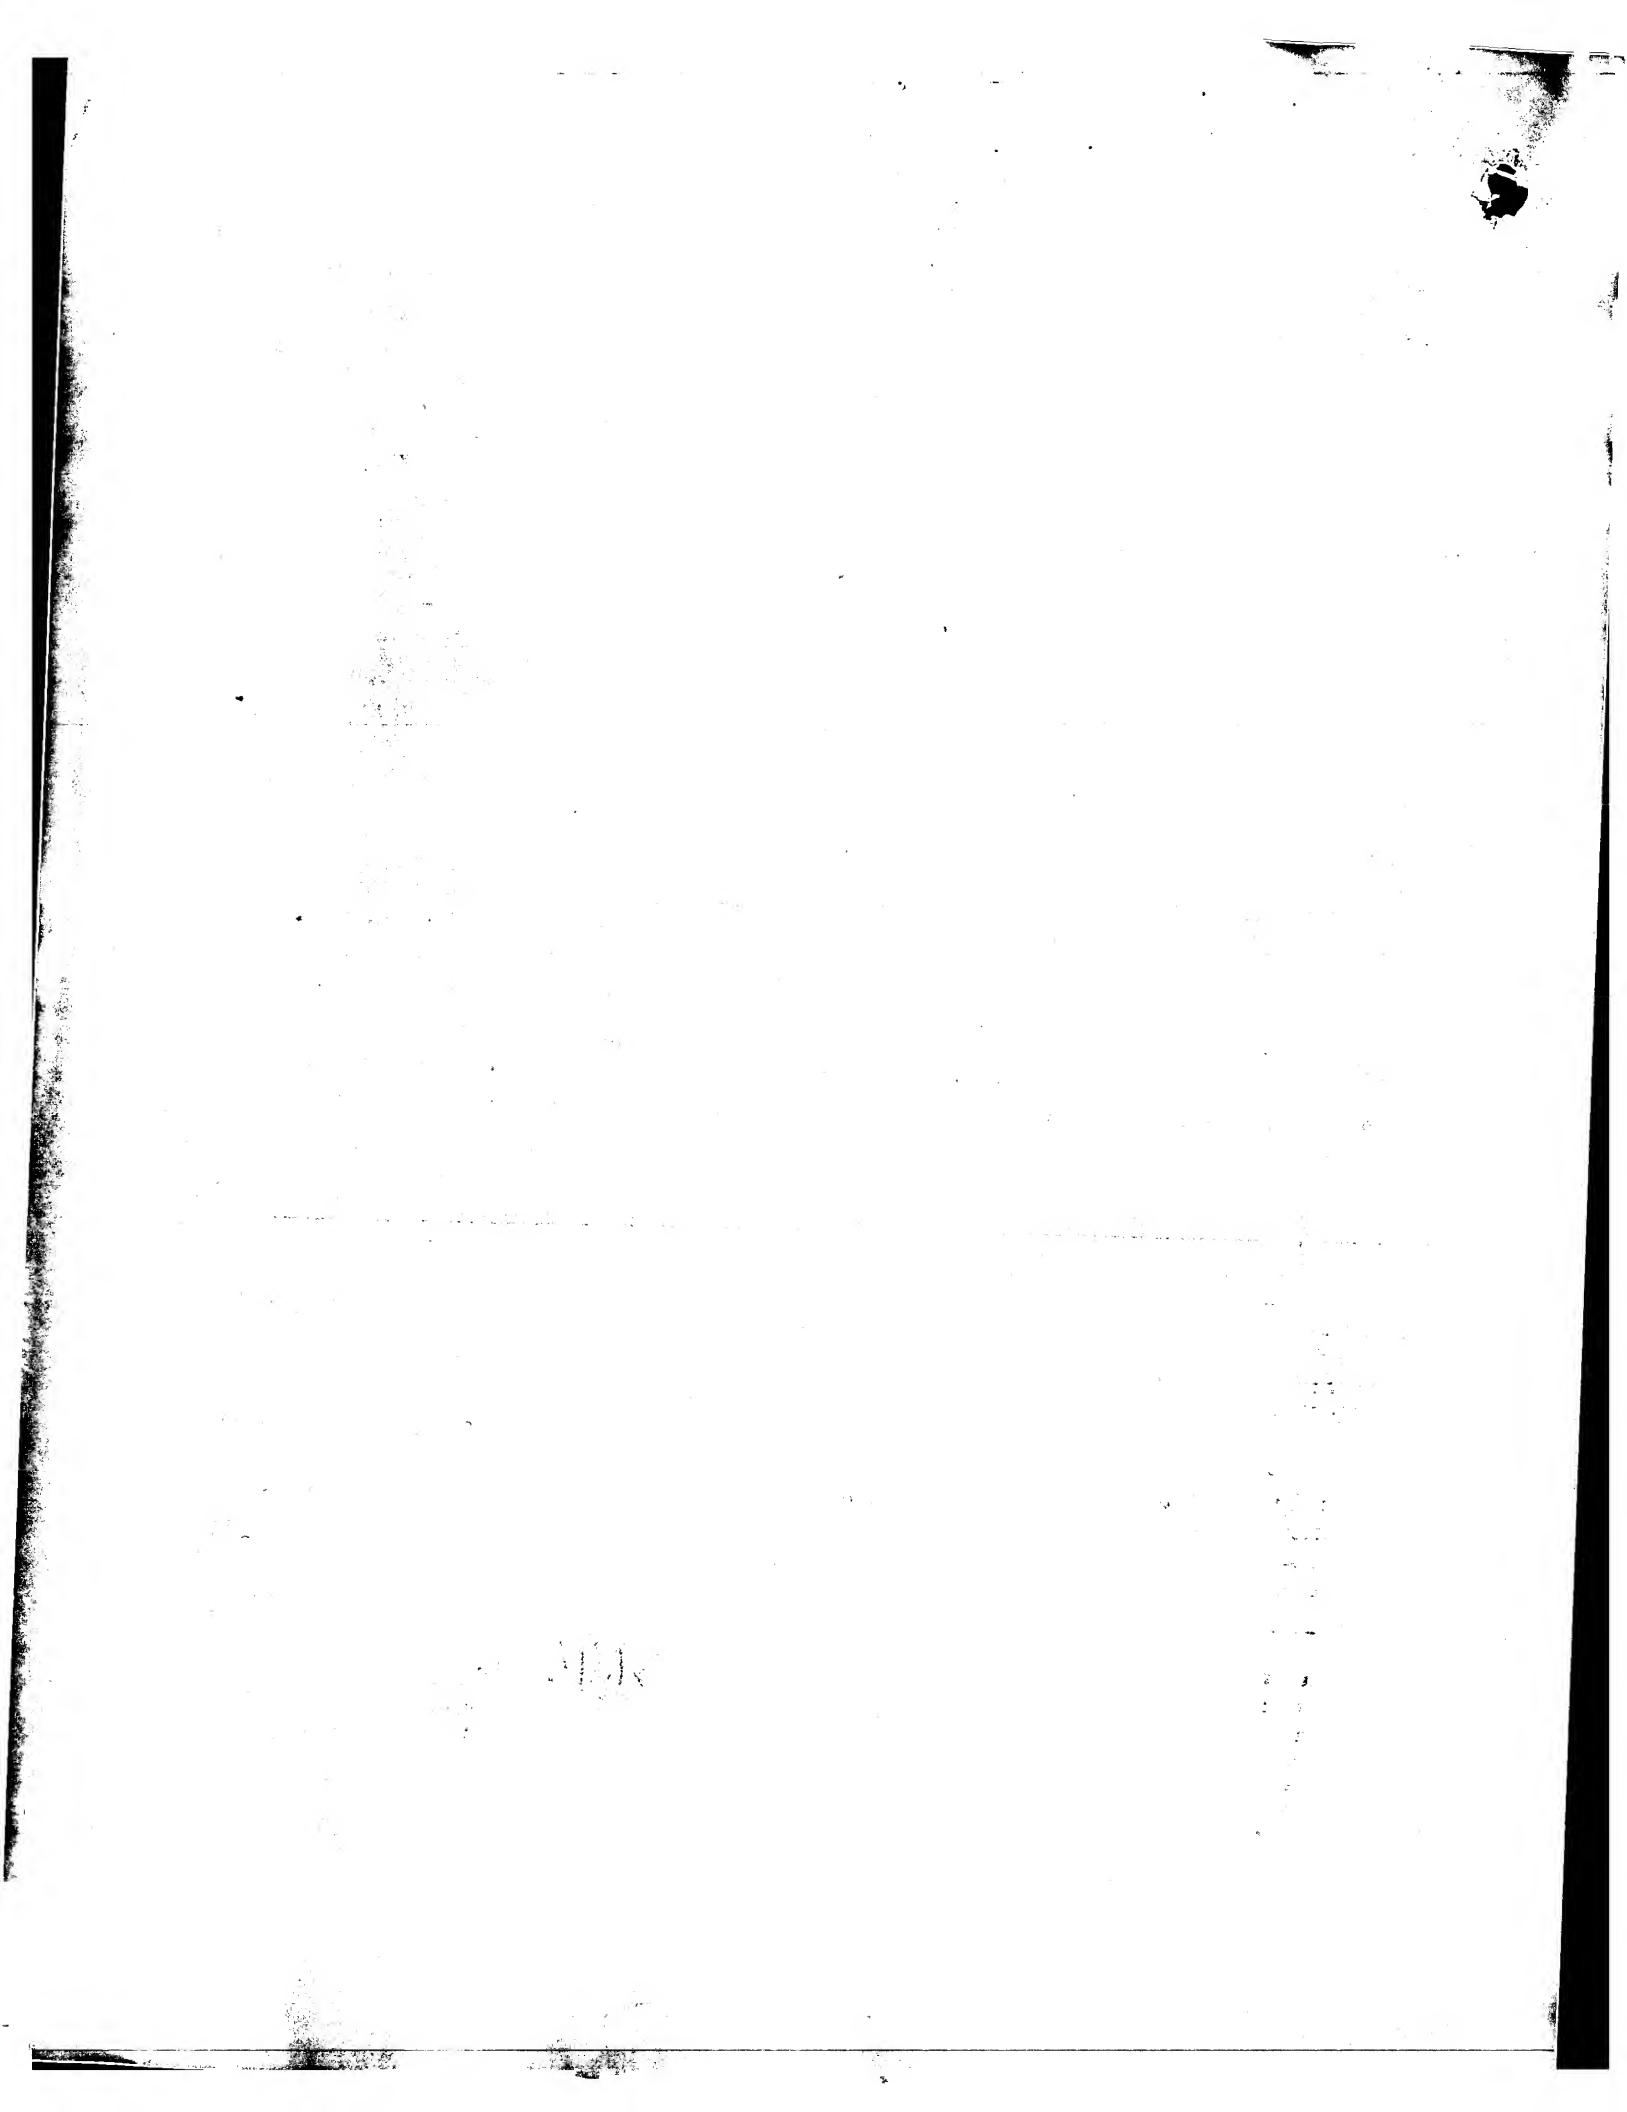

The
Patent
Office16DEC02 E770989-5 D02898
F01/7700 0.00-0229147.4

Request for grant of a patent
(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference

C4276(C)/TC

2. Patent application number
(The Patent Office will fill in this part)

0229147.4

113 DEC 2002

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*UNILEVER PLC
UNILEVER HOUSE, BLACKFRIARS
LONDON, EC4P 4BQPatents ADP number *(if you know it)*

50426956002 1628002

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

POLYMERS AND LAUNDRY DETERGENT COMPOSITIONS CONTAINING THEM

5. Name of your agent *(if you have one)*

FRANSELLA Mary Evelyn

Elliott, Peter William

PATENT DEPARTMENT, UNILEVER PLC
COLWORTH HOUSE, SHARNBROOK
BEDFORD, MK44 1LQ

81376648001 6573927001

Patents ADP number *(if you know it)*6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application numberCountry Priority application number
(if you know it) Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application Date of filing
*(day/month/year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	23
Claim(s)	5
Abstract	1 / <i>JM</i>
Drawing(s)	

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)


1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature(s) 

Date: 13/12/02

Sandra Jane EDWARDS, Authorised Signatory

12. Name and daytime telephone number of person to contact in the United Kingdom

Trudi Clark, Tel 01234 22 2360

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

POLYMERS AND LAUNDRY DETERGENT COMPOSITIONS CONTAINING THEMTECHNICAL FIELD

5

The present invention relates to laundry detergent compositions containing certain graft copolymers. The compositions exhibit improved soil release, especially of oily soil from cotton fabrics, during the wash.

10

BACKGROUND AND PRIOR ART

Laundry detergent compositions containing soil release polymers, which assist the release of soil from fabrics during the laundry process, have been widely disclosed in the art.

Polyesters of terephthalic and other aromatic dicarboxylic acids, in particular, the so-called PET/POET (polyethylene terephthalate/polyoxyethylene terephthalate) and PET/PEG (polyethylene terephthalate/polyethylene glycol) polyesters, are known to have soil release properties. Such polyesters are disclosed, for example, in US 3 557 039 (ICI), GB 1 467 098, EP 1305A and EP 271 312B (Procter & Gamble). Sulphonated polyesters having soil release properties are disclosed in EP 874 892A, EP 977 827A, EP 1 019 476A, and EP 1 012 512A (Unilever).

30

The mechanism of action for many soil release polymers is that a polymeric layer is deposited on the fibres and modifies their surface so that subsequent soiling is deposited on and adheres to the polymeric layer rather than
5 the fibres themselves. Removal of the soil during the next wash is thus greatly facilitated. Alternatively some polymers may assist release of soil directly from the fibres.

10 While improved release of soil from synthetic fabrics such as polyester has been successfully achieved, especially with the so-called PET/POET type of polymer, the effective release of soils, especially oily soils, from cotton has proved much more difficult.
15 WO 97 42285A discloses soil release polymers for cotton comprising a polyamine backbone and quaternary ammonium cationic groups. While substantivity to cotton is good, these materials have been found to give some negatives,
20 notably staining of the laundered fabrics. The presence of anionic surfactants also interferes with the action of the polymers because of their high density of positive charge.
25 There remains a need in the art to identify soil release polymers that give good substantivity to cotton without other detrimental properties.

DEFINITION OF THE INVENTION

The present invention provides a graft copolymer having a molecular weight of at least 10 000 comprising:

- 5 (a) backbone units derived from an ethylenically unsaturated monomer,
- (b) hydrophilic uncharged side chains, and
- (c) cationically chargeable or charged side chains containing a tertiary or quaternary nitrogen atom.

10

The invention also provides a process for the preparation of the graft copolymer.

The present invention further provides a laundry detergent 15 composition comprising an organic surfactant, and a graft copolymer as defined in the previous paragraph, in an amount effective to improve soil release.

The invention further provides the use of a graft copolymer 20 as defined above in a laundry detergent composition to promote the release of soil from textile fabrics during laundering.

25 DETAILED DESCRIPTION OF THE INVENTION

The novel graft copolymers of the invention, when incorporated in a laundry detergent composition, have been found to give significantly improved release of oily soil 30 from cotton fabrics even in a low-temperature (30°C) wash.

The graft copolymer

The graft copolymer of the present invention comprises:

(a) backbone units derived from an ethylenically
5 unsaturated monomer,

(b) hydrophilic uncharged side chains,

(c) cationically chargeable or charged side chains
containing a tertiary or quaternary nitrogen atom.

10 The backbone units (a) are preferably units derived from an
ethylenically unsaturated carboxylate. More preferably the
backbone units (a) are methacrylate units.

Suitably the backbone comprises from 10 to 100 units, more

15 preferably from 20 to 60 units.

The hydrophilic uncharged side chains (b) preferably have a
chain length of at least 6 carbon atoms, more preferably at
least 10 carbon atoms.

20

The units (b) are most preferably polyethylene oxide chains.
Preferably the polyethylene oxide chains comprise at least
3, and more preferably at least 6, ethylene oxide units.
Advantageously they comprise at least 20, and most
25 preferably at least 30, ethylene oxide units.

Without wishing to be bound by theory, it is believed that
the polymer forms a layer which in the wash liquor has a
thickness of at least 5-10 nanometres but which collapses on
30 drying and re-swells during the next wash. This property of
re-swellability is believed to be due to the presence of the

uncharged hydrophilic side-chains which should be at least of a certain length.

The function of the cationically chargeable or charged side
5 chains (c) is to bond with the cotton surface.

Preferably the units (c) are units of an ethylenically unsaturated monomer containing an aliphatic or aromatic moiety which contains a tertiary or quaternary nitrogen
10 atom.

More preferably the units (c) are units of a tertiary amine acrylate or methacrylate which may optionally be wholly or partially quaternised.

15 Especially preferred are units of 2-dimethylaminoethyl methacrylate (DMAEMA) which may optionally be wholly or partially quaternised.

20 Thus the preferred graft copolymers comprise
(a) backbone units of methacrylate,
(b) polyethylene oxide side chains, and
(c) side chains of 2-dimethylaminoethyl methacrylate (DMAEMA).

25 Suitably the graft copolymer comprises a total from 70 to 99 mole%, preferably from 75 to 98 mole%, of the backbone units (a) and hydrophilic uncharged units (b); and from 1 to 30 mole%, preferably from 2 to 25 mole%, of the cationically charged or chargeable units (c).

The units (c) may optionally be wholly or partially in quaternised form. However, the wholly unquaternised form appears to give the best results.

5 The graft copolymer has a number average molecular weight of at least 10 000, preferably from 50 000 to 1 000 000, more preferably from 100 000 to 500 000. The polymer preferably has a weight average molecular weight of at least 20 000, preferably from 100 000 to 2 000 000, more preferably from
10 200 000 to 1 000 000.

Especially preferred are polymers having number average molecular weights of from 100 000 to 200 000 and weight average molecular weights of from 200 000 to 600 000.

15

Preparation of the graft copolymers

The graft copolymer of the invention may suitably be prepared by a process which comprises reacting
20 (i) a copolymer having backbone units derived from an ethylenically unsaturated monomer and hydrophilic uncharged side chains with
(ii) a monomer containing cationically chargeable or charged side chains containing a tertiary or quaternary nitrogen atom,
25 in the presence of a free radical initiator.

For the preferred graft copolymers described above, theA process comprises reacting polyethylene glycol methyl ether
30 methacrylate (PEGMA) with a tertiary amine acrylate or

methacrylate which may optionally be wholly or partially quaternised, most preferably 2-dimethylaminoethyl methacrylate (DMAEMA).

5

The laundry detergent composition

In the detergent composition of the invention, the polymer is present in an amount sufficient to provide enhanced soil 10 release. Suitably the polymer is present in an amount of from from 0.1 to 10 wt%, preferably from 0.25 to 5 wt%.

The detergent composition may suitably comprise:

- (a) from 5 to 60 wt%, preferably from 10 to 40 wt%, of 15 organic surfactant,
- (b) optionally from 5 to 80 wt%, preferably from 10 to 60 wt%, of detergency builder,
- (c) from 0.1 to 10 wt%, preferably from 0.25 to 5 wt%, of the graft copolymer,
- 20 (d) optionally other detergent ingredients to 100 wt%.

The organic surfactant

25 The compositions of the invention may contain any organic surfactants (detergent-active compounds) suitable for incorporation into laundry detergent compositions.

Detergent-active compounds (surfactants) may be chosen from 30 soap and non-soap anionic, cationic, nonionic, amphoteric and zwitterionic detergent-active compounds, and mixtures

thereof. Many suitable detergent-active compounds are available and are fully described in the literature, for example, in "Surface-Active Agents and Detergents", Volumes I and II, by Schwartz, Perry and Berch. The preferred

5 detergent-active compounds that can be used are soaps and synthetic non-soap anionic and nonionic compounds. The total amount of surfactant present is suitably within the range of from 5 to 60 wt%, preferably from 5 to 40 wt%.

10 Anionic surfactants are well-known to those skilled in the art. Examples include alkylbenzene sulphonates, particularly linear alkylbenzene sulphonates having an alkyl chain length of C₈-C₁₅; primary and secondary alkylsulphates, particularly C₈-C₂₀ primary alkyl sulphates; 15 alkyl ether sulphates; olefin sulphonates; alkyl xylene sulphonates; dialkyl sulphosuccinates; and fatty acid ester sulphonates. Sodium salts are generally preferred.

20 Nonionic surfactants that may be used include the primary and secondary alcohol ethoxylates, especially the C₈-C₂₀ aliphatic alcohols ethoxylated with an average of from 1 to 20 moles of ethylene oxide per mole of alcohol, and more especially the C₁₀-C₁₅ primary and secondary aliphatic alcohols ethoxylated with an average of from 1 to 10 moles 25 of ethylene oxide per mole of alcohol. Non-ethoxylated nonionic surfactants include alkylpolyglycosides, glycerol monoethers, and polyhydroxyamides (glucamide).

30 Cationic surfactants that may be used include quaternary ammonium salts of the general formula R₁R₂R₃R₄N⁺ X⁻ wherein the R groups are long or short hydrocarbyl chains, typically

alkyl, hydroxyalkyl or ethoxylated alkyl groups, and X is a solubilising anion (for example, compounds in which R₁ is a C₈-C₂₂ alkyl group, preferably a C₈-C₁₀ or C₁₂-C₁₄ alkyl group, R₂ is a methyl group, and R₃ and R₄, which may be the same or
5 different, are methyl or hydroxyethyl groups); and cationic esters (for example, choline esters).

The optional detergency builder

10

Preferably, the detergent compositions of the invention also contain one or more detergency builders. The total amount of detergency builder in the compositions may suitably range from 5 to 80 wt%, preferably from 10 to 60 wt%.

15

Preferred builders are alkali metal aluminosilicates, more especially crystalline alkali metal aluminosilicates (zeolites), preferably in sodium salt form.

20 Zeolite builders may suitably be present in a total amount of from 5 to 60 wt%, preferably from 10 to 50 wt%.

25 The zeolites may be supplemented by other inorganic builders, for example, amorphous aluminosilicates, or layered silicates such as SKS-6 ex Clariant.

30 The zeolites may be supplemented by organic builders, for example, polycarboxylate polymers such as polyacrylates and acrylic/maleic copolymers; monomeric polycarboxylates such as citrates, gluconates, oxydisuccinates, glycerol mono-, di- and trisuccinates, carboxymethyloxysuccinates,

- 10 -

carboxymethyloxymalonates, dipicolinates, hydroxyethyliminodiacetates, alkyl- and alkenylmalonates and succinates; and sulphonated fatty acid salts.

5 Alternatively, the compositions of the invention may contain phosphate builders, for example, sodium tripolyphosphate.

Especially preferred organic builders are citrates, suitably used in amounts of from 1 to 30 wt%, preferably from 2 to 10 15 wt%; and acrylic polymers, more especially acrylic/maleic copolymers, suitably used in amounts of from 0.5 to 15 wt%, preferably from 1 to 10 wt%. Builders, both inorganic and organic, are preferably present in alkali metal salt, especially sodium salt, form.

15

According to a preferred embodiment of the invention, the detergency builder, which is present in an amount of from 5 to 80 wt%, preferably from 10 to 60 wt%, is selected from sodium tripolyphosphate, zeolites, sodium carbonate and 20 mixtures thereof.

Other detergent ingredients

25 Detergent compositions according to the invention may also suitably contain a bleach system. Preferably this will include a peroxy bleach compound, for example, an inorganic persalt or an organic peroxyacid, capable of yielding hydrogen peroxide in aqueous solution.

30

Preferred inorganic persalts are sodium perborate monohydrate and tetrahydrate, and sodium percarbonate, the latter being especially preferred. The sodium percarbonate may have a protective coating against destabilisation by
5 moisture. The peroxy bleach compound is suitably present in an amount of from 5 to 35 wt%, preferably from 10 to 25 wt%.

The peroxy bleach compound may be used in conjunction with a bleach activator (bleach precursor) to improve bleaching
10 action at low wash temperatures. The bleach precursor is suitably present in an amount of from 1 to 8 wt%, preferably from 2 to 5 wt%. Preferred bleach precursors are peroxycarboxylic acid precursors, more especially peracetic acid precursors and peroxybenzoic acid precursors; and
15 peroxycarbonic acid precursors. An especially preferred bleach precursor suitable for use in the present invention is N,N,N',N'-tetracetyl ethylenediamine (TAED).

A bleach stabiliser (heavy metal sequestrant) may also be
20 present. Suitable bleach stabilisers include ethylenediamine tetraacetate (EDTA), diethylenetriamine pentaacetate (DTPA), ethylenediamine disuccinate (EDDS), and the polyphosphonates such as the Dequests (Trade Mark), ethylenediamine tetramethylene phosphonate (EDTMP) and
25 diethylenetriamine pentamethylene phosphate (DETPMP).

The compositions of the invention may contain alkali metal carbonate, preferably sodium carbonate, in order to increase detergency and ease processing. Sodium carbonate may
30 suitably be present in amounts ranging from 1 to 60 wt%, preferably from 2 to 40 wt%.

- 12 -

As previously indicated, sodium silicate may also be present. The amount of sodium silicate may suitably range from 0.1 to 5 wt%. Sodium silicate, as previously indicated, is preferably introduced via the second base
5 granule.

Powder flow may be improved by the incorporation of a small amount of a powder structurant. Examples of powder structurants, some of which may play other roles in the
10 formulation as previously indicated, include, for example, fatty acids (or fatty acid soaps), sugars, acrylate or acrylate/maleate polymers, sodium silicate, and dicarboxylic acids (for example, Sokalan (Trade Mark) DCS ex BASF). One preferred powder structurant is fatty acid soap, suitably
15 present in an amount of from 1 to 5 wt%.

Other materials that may be present in detergent compositions of the invention include antiredeposition agents such as cellulosic polymers; soil release agents;
20 anti-dye-transfer agents; fluorescers; inorganic salts such as sodium sulphate; enzymes (proteases, lipases, amylases, cellulases); dyes; coloured speckles; perfumes; and fabric conditioning compounds. This list is not intended to be exhaustive.
25

Product form and preparation

The compositions of the invention may be of any suitable physical form, for example, particulates (powders, granules,
30 tablets), liquids, pastes, gels or bars.

According to one especially preferred embodiment of the invention, the detergent composition is in particulate form.

Powders of low to moderate bulk density may be prepared by
5 spray-drying a slurry, and optionally postdosing (dry-mixing) further ingredients. "Concentrated" or "compact" powders may be prepared by mixing and granulating processes, for example, using a high-speed mixer/granulator, or other non-tower processes.

10

Tablets may be prepared by compacting powders, especially "concentrated" powders.

Also preferred are liquid detergent compositions, which may
15 be prepared by admixing the essential and optional ingredients in any desired order to provide compositions containing the ingredients in the requisite concentrations.

20 Incorporation of the graft copolymer

The polymers may be incorporated at any suitable stage in the manufacture of the compositions of the invention.

25 For example, in the manufacture of spray-dried particulate compositions, polymer in powder or solution (preferably aqueous) form may be incorporated in the slurry. For non-tower particulates, polymer powder or solution may be easily introduced into mixing and granulating apparatus, either
30 alone or in admixture with other solid or liquid ingredients as appropriate.


EXAMPLES

The invention is further illustrated by the following Examples.

5

EXAMPLES 1 to 8:preparation and characterisation of polymers

10 Polymers were prepared to the general formula below:

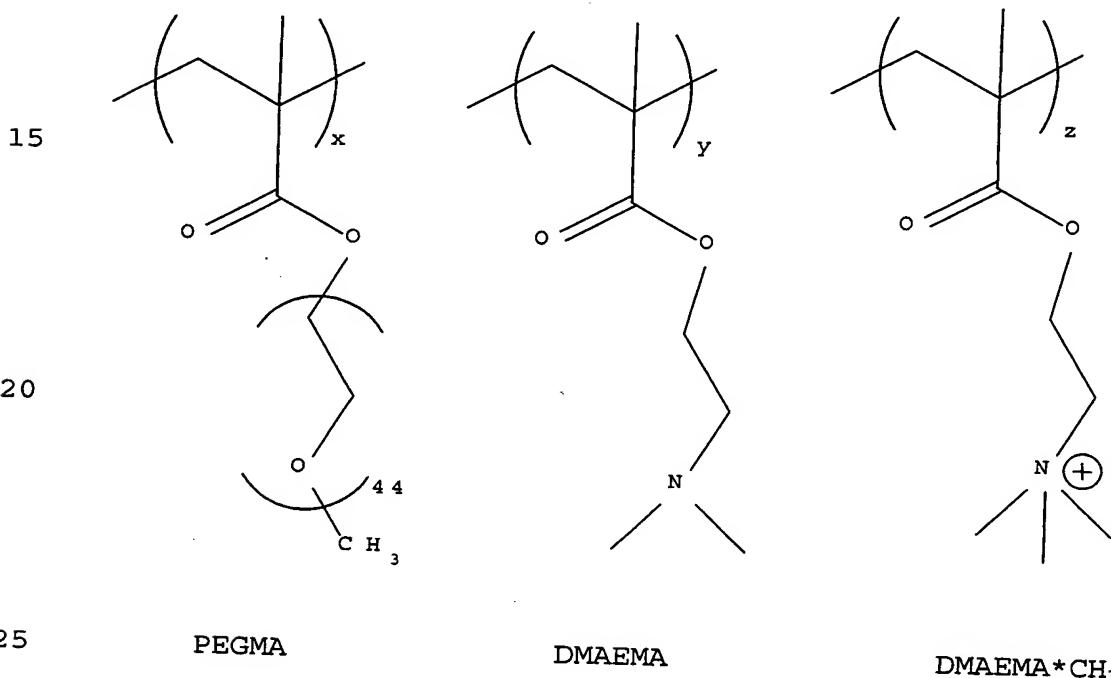

25

PEGMA

DMAEMA

DMAEMA* CH_3Cl

PEGMA = polyethylene glycol methacrylate

DMAEMA = 2-dimethylaminoethyl methacrylate

30

The polymers shown in Table 1 below were prepared, the figures representing mole ratios of the monomers used:

Table 1

5

Example	PEGMA (x)	DMAEMA (y)	Quaternised DMAEMA (z) (DMAEMA*CH ₃ Cl)
1	95	5	
2	90	10	
3	75	25	
4	98		2
5	95		5
6	90		10
7	75		5
8	90	5	5

Experimental details of polymer preparation

10 Appropriate amounts of initiator azobisisobutyronitrile (AIBN) and of the monomers PEGMA 2000 (50 wt% aqueous solution of polyethyleneglycol-2000 methyl ether methacrylate) and DMEAMA (dimethylaminoethylmethacrylate (ex Aldrich) and/or DMAEMA*CH₃Cl (70 wt% aqueous solution of 15 dimethylaminoethylmethacrylate methyl chloride (ex Polysciences Inc.) were placed into a glass ampoule. PEGMA-2000 was used to dose PEGMA. Isopropanol was then added in order that the resultant solution contained 30 wt% total concentration of monomers and 0.3 wt% of initiator. The 20 reaction mixture was then flushed with a moderate flow of nitrogen gas for 15 minutes. The ampoule was subsequently

sealed and placed into a water bath (60°C). Usually, the initiator completely dissolved during the nitrogen flush however, if required, the ampoule was lightly shaken until the initiator completely dissolved. Copolymerisation was
5 carried out for 20 hours.

After copolymerisation the ampoule was opened and the contents (quantitatively) transferred into dialysis tubing using as small amounts of distilled water as possible.
10 Visking Dialysis Tubing 27/32 (pore size 24 Å, exclusion limits 8000-15000 D) was used for purification of the copolymers. Usually, about 100 ml of copolymer solution was poured into the dialysis tubing, while the volume of the outer distilled water was ca 1 litre. The dialysis process
15 was done over a period of four days under constant mixing of the outer distilled water, which was changed twice per day.

The copolymer solution from the dialysis tubing was quantitatively transferred into a round bottom 0.5-1 litre
20 flask. Using a vacuum rotating evaporator, the solution was concentrated up to a viscous syrup. The viscous syrup (copolymer with small amount of water) was then quantitatively transferred into a Petri dish and dried at room temperature for 2-3 days up to a solid state. Finally,
25 the copolymer was well dried in a vacuum oven at 60°C for 24 hours.

Characterisation of the copolymers

The chemical composition of each copolymer was determined by means of proton NMR spectroscopy. Table 2 reports the relative molar composition of the various monomers in the final copolymers. The determined compositions were in close agreement with the reaction feed ratios.

The molecular weights of the materials were determined by Gel Permeation Chromatography. The eluent used was a 0.3M $\text{NaNO}_3 + 2 \text{ ml/L NaOH}$ solution. Both Light Scattering and Refractive Index detectors were used to determine the number average (M_n) and weight average (M_w) molecular weight of each copolymer. These molecular weights are recorded in Table 2.

Table 2

Exam ple	Copolymer composition, mole%	M_n (g/mol)	M_w (g/mol)	Polydisp (M_w/M_n)
1	PEGMA : DMAEMA = 95 : 5	119 700	310 350	2.6
2	PEGMA : DMAEMA = 90 : 10	156 750	491 100	3.1
3	PEGMA : DMAEMA = 75 : 25	158 200	554 650	3.5
4	PEGMA : DMAEMA*CH ₃ Cl = 98 : 2	151 400	423 000	2.8
5	PEGMA : DMAEMA*CH ₃ Cl = 95 : 5	826 400	1 785 500	2.2
6	PEGMA : DMAEMA*CH ₃ Cl = 90 : 10	182 950	566 200	3.1
7	PEGMA : DMAEMA*CH ₃ Cl = 75 : 25	131 550	234 950	1.8
8	PEGMA : DMAEMA : DMAEMA*CH ₃ Cl = 90 : 5 : 5	142 900	540 850	3.9

Preparation of the polymer of Example 8

Polymer example 8 was synthesised by using 24.96 g (6 mmol),
 0.0524 g DMAEMA (0.333 mmol) and 0.0989 g DMAEMA*CH₃Cl (5
 0.333 mmol), 0.1314 g AIBN and 16.89 g isopropanol.

Soil release evaluation

10 Release of oily soil (dirty motor oil) from cotton was evaluated using a built laundry detergent composition having the following formulation:

	Weight%
Linear alkylbenzene sulphonate	23.00
Cationic surfactant (C ₁₂₋₁₄ alkyl dimethyl hydroxyethyl ammonium chloride)	0.80
Sodium tripolyphosphate	14.50
Sodium carbonate	17.50
Sodium silicate	7.00
Sodium sulphate	28.52
Sodium carboxymethyl cellulose	0.37
Fluorescers	0.19
Enzymes (protease, lipase, amylase)	0.94
Blue colour, perfume	0.44
Moisture etc	6.92

Methodology

The polymers of Examples 1 to 8 were tested for soil release from white cotton fabric using an apparatus for simulating a pretreatment/soiling/wash procedure on a small scale.

Using this apparatus, the fabric was pretreated with wash liquors with and without polymers according to the invention; the fabric was then soiled, and subjected to a simulated main wash procedure using wash liquors with and without polymers according to the invention.

The apparatus

The wash apparatus used allows different liquids to be simultaneously contacted with different regions of a single sheet of fabric. The fabric sheet is clamped between an upper and lower block. The fabric sheet is sandwiched between two rubber seals. Both blocks and seals contain an 8 x 12 array of square cavities, which are aligned. When blocks and fabrics are clamped together, liquids placed in individual wells do not leak or bleed through to other wells, due to the pressure applied by the blocks in the regions separating the wells. The liquids are forced to flow back and forth through the fabric by means of a pneumatically actuated thin rubber membrane, which is placed between the fabrics and the lower block. Repeated flexing of the membrane away from and towards the fabrics results in fluid motion through the fabrics.

Pretreatment

A white cotton fabric was prewashed in the above apparatus. 200 μL doses of each wash solution under test were placed in 5 appropriate wells in the washing apparatus. The liquids flowed through the fabrics for 20 minutes, at 30 °C with a flow cycle time of 1.5 seconds. After 20 minutes, the free liquid in the cells was poured off. The blocks where then separated and the fabric removed, and thoroughly rinsed for 10 1 minute in 200 ml demineralised water. The fabrics were allowed to dry for 24 hours.

Soiling

15 The dry fabric was placed on top of a 96 well polypropylene microtitre plate. 5 μL of dirty motor oil (15% weight in toluene) was dispensed from a pipette, onto the centre of each of the 96 cells on the cloth. The stained fabrics were 20 allowed to dry at room temperature for 24 hours. Reflectance was then measured using a flatbed scanner.

Main wash

25 The test fabric was then re-clamped in the washing apparatus, 200 μL doses of each wash solution were placed in appropriate wells. The liquids flowed through the fabrics for 20 minutes, at 30 °C with a flow cycle time of 1.5 30 seconds. After 20 minutes, the free liquid in the cells was poured off. The blocks where then separated and the fabric

removed, and thoroughly rinsed for 1 minute in 200 mL demineralised water. The fabrics were allowed to dry for 24 hours. Reflectance was then measured using a flatbed scanner.

5

Experimental conditions

The experiments were carried out at product doses of 1.3 and
10 4 g/L, in water of 0, 6 and 12 °FH, the hardness being made up of three parts calcium to 1 part magnesium.

For the prewash, the polymers were dosed at levels of 4 times the level used in the main wash (see below), and there
15 was also a polymer-free control for each set of conditions.

For the main wash, the polymers were dosed at levels of 10,
20, 50 and 200 ppm, and there was also a polymer-free control for each set of conditions.

20

Results are expressed as the increase in reflectance on washing (ΔR) at 460 nm.

Polymer of Example 1

Water hardness (°F)	Product dose g/L	ΔR at 460 nm for polymer concentrations of				
		0	10 ppm	20 ppm	50 ppm	200 ppm
0	1.3	8.94	11.82	14.27	11.45	9.27
6	1.3	9.31	12.92	15.11	13.23	11.20
12	1.3	9.47	12.47	15.58	14.36	12.83
0	4	22.89	32.85	32.75	29.23	25.36
6	4	22.81	33.04	34.42	29.22	25.53
12	4	20.59	32.36	33.91	29.69	26.00

5 Polymer of Example 4

Water hardness (°F)	Product dose g/L	ΔR at 460 nm for polymer concentrations of				
		0	10 ppm	20 ppm	50 ppm	200 ppm
0	1.3	8.94	12.63	13.79	10.15	9.85
6	1.3	9.31	13.64	13.16	12.53	11.50
12	1.3	9.47	15.41	15.52	11.96	13.66
0	4	22.89	33.33	33.25	27.30	24.98
6	4	22.81	33.02	33.32	28.25	26.13
12	4	20.59	32.39	32.62	27.39	25.46

10 It will be seen that the highest level of polymer did not give the best results. Optimum benefit was found at levels of 10-20 ppm in the wash liquor, at both high and low product dosages.

The following table shows the results for all 8 polymers averaged over all levels (10-200 ppm), and shows that all were better than the control without polymer. As a further
 5 control, sodium carboxymethyl cellulose (SCMC) was used.

Polymer of Example	0°FH	6 °FH	12 °FH	0°FH	6°FH	12°FH
	1.3 g/L product dose			4g/L product dose		
1	10.02	12.34	12.97	27.53	28.17	28.60
2	10.67	12.23	14.04	27.07	27.47	27.43
3	11.52	12.97	14.30	27.85	26.59	26.37
4	10.99	12.56	13.68	26.92	27.88	27.45
5	9.42	11.65	11.63	26.29	26.32	25.76
6	8.96	11.89	13.42	26.50	26.48	25.35
7	8.03	10.92	10.67	24.36	23.28	23.50
8	9.42	11.54	13.27	27.29	27.10	26.65
No polymer	8.22	9.90	10.15	25.21	24.69	23.26
SCMC	8.11	10.34	11.89	25.66	24.61	24.21

CLAIMS

1 A graft copolymer having a number average molecular
5 weight of at least 10 000 comprising:
(a) backbone units derived from an ethylenically
unsaturated monomer,
(b) hydrophilic uncharged side chains, and
(c) cationically chargeable or charged side chains
10 containing a tertiary or quaternary nitrogen atom.

2 A graft copolymer as claimed in claim 1, wherein the
backbone units (a) are units derived from an ethylenically
15 unsaturated carboxylate.

3 A graft copolymer as claimed in claim 2, wherein the
backbone units (a) are methacrylate units.
20

4 A graft copolymer as claimed in any preceding claim,
wherein the units (b) have a chain length of at least 6
carbon atoms, preferably at least 10 carbon atoms.
25

5 A graft copolymer as claimed in any preceding claim,
wherein the hydrophilic uncharged side chains (b) are
polyethylene oxide chains.
30

6 A graft copolymer as claimed in claim 5, wherein the polyethylene oxide chains comprise at least 3, preferably at least 6, ethylene oxide units.

5

7 A graft copolymer as claimed in claim 6, wherein the polyethylene oxide chains comprise at least 10, preferably at least 30, polyethylene oxide units.

10

8 A graft copolymer as claimed in any preceding claim, wherein the units (c) are units of an ethylenically unsaturated monomer containing an aliphatic or aromatic moiety which contains a tertiary or quaternary nitrogen atom.

15

9 A graft copolymer as claimed in claim 8, wherein the units (c) are units of a tertiary amine acrylate or methacrylate which may optionally be wholly or partially quaternised.

10 A graft copolymer as claimed in claim 9, wherein the units (c) are units of 2-dimethylaminoethyl methacrylate (DMAEMA) which may optionally be wholly or partially quaternised.

25

11 A graft copolymer as claimed in any preceding claim,
which comprises:

- (a) backbone units of methacrylate,
- (b) polyethylene oxide side chains, and

5 (c) side chains of dimethylaminoethylmethacrylate (DMAEMA)
which may optionally be wholly or partially quaternised.

12 A graft copolymer as claimed in any preceding claim,
10 which comprises from 70 to 99 mole%, in total, of the units
(a) and (b), and from 1 to 30 mole% of the units (c).

13 A graft copolymer as claimed in any preceding claim,
15 having a number average molecular weight of at least 10 000,
preferably from 50 000 to 1 000 000, more preferably from
100 000 to 500 000, and a weight average molecular weight of
at least 20 000, preferably from 100 000 to 2 000 000, more
preferably from 200 000 to 1 000 000.

20

14 A process for the preparation of a graft polymer as
claimed in claim 1, which comprises reacting
(i) a copolymer having backbone units derived from an
25 ethylenically unsaturated monomer and hydrophilic uncharged
side chains with
(ii) a monomer containing cationically chargeable or charged
side chains containing a tertiary or quaternary nitrogen
atom,
30 in the presence of a free radical initiator.

15 A process as claimed in claim 14, which comprises reacting polyethylene glycol methyl ether methacrylate (PEGMA) with a tertiary amine acrylate or methacrylate which
5 may optionally be wholly or partially quaternised.

16 A process as claimed in claim 15, which comprises reacting PEGMA with 2-dimethylaminoethyl methacrylate
10 (DMAEMA), optionally in wholly or partly quaternised form.

17 A laundry detergent composition comprising an organic detergent surfactant, and a graft copolymer as claimed in
15 any one of claims 1 to 13 in an amount effective to improve soil release.

18 A detergent composition as claimed in claim 17, which
20 contains from 0.1 to 10 wt%, preferably from 0.25 to 5 wt%, of the graft copolymer.

19 A detergent composition as claimed in claim 17 or claim
25 18, which comprises:

- (a) from 5 to 60 wt%, preferably from 10 to 40 wt%, of organic detergent surfactant,
- (b) optionally from 5 to 80 wt%, preferably from 10 to 60 wt%, of detergency builder,
- 30 (c) from 0.1 to 10 wt%, preferably from 0.25 to 5 wt%, of the graft copolymer, and

(d) optionally other detergent ingredients to 100 wt%.

20 A method of promoting soil release during laundering of
5 a textile fabric, which method comprises contacting the
fabric with a graft copolymer as claimed in any one of
claims 1 to 13 and subsequently washing the fabric after
wear or use of the fabric.

10

21 Use of a graft copolymer as claimed in any one of
claims 1 to 13 in a laundry detergent composition to promote
the release of soil from textile fabrics during laundering.

15

* * *

ABSTRACT

Graft copolymers providing soil release benefits in laundry
5 detergent compositions contain backbone units derived from
an ethylenically unsaturated monomer, hydrophilic uncharged
side chains, and cationically chargeable or charged side
chains containing a tertiary or quaternary nitrogen atom.
Preferred copolymers have a methacrylate backbone with
10 polyethylene oxide and 2-dimethylaminoethyl methacrylate
(DMAEMA) side chains. The graft copolymers may be prepared
by radical polymerisation.

